


INITIAL ARMING INSTRUCTIONS: 3042M, 3045M

24 Gram CO₂ Cylinder, 1/2" Thread

Note: This inflatable life jacket is shipped with the CO₂ cylinder **UNINSTALLED**. The user **must** install this part before the life jacket is ready for use.

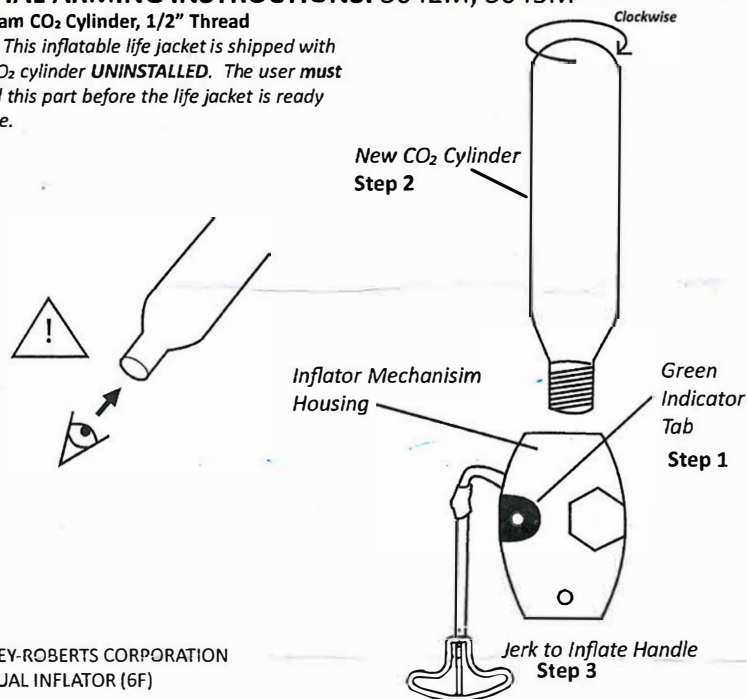

840

HALKEY-ROBERTS CORPORATION
MANUAL INFLATOR (6F)

Step 1: Ensure manual inflator arm is closed and green indicator tab is present before inserting the new CO₂ cylinder.

NOTE: Green pin will break when "Jerk to Inflate" handle is pulled.



WARNING: Inspect the face of the new cylinder before inserting. Ensure there are no holes or scratches.
IMPORTANT! Do not install cylinder if not in proper condition.

Step 2: Install new CO₂ cylinder into the inflator by rotating clockwise into inflator mechanism housing until cylinder is firmly secured. Ensure fit is tight - do not over-tighten.

Step 3: Follow refolding and repacking instructions to make sure that the "Jerk to Inflate" handle is placed correctly outside of the closed cover.

Step 4: Carefully read all information and follow all instructions in the "Owner's Manual" and "Think Safe" booklet before using this life jacket.

NOTE: If the green indicator tab is not present, a red dot will show on the mechanism.

For additional information, visit www.machovec.com

MACHOVEC PO Box 307 Monticello, MN 763-263-9835